


The IT insert fireplace offers your home tremendous heat without losing any room space. Its classic lines give it enduring style, making it a distinguished centerpiece for hearth and home.

The height of the ITH model brings even more radiant warmth to your home. Both the IT and ITH inserts are available with either a painted graphite or nickel-plated frame.

In addition to the comforting radiant heat they generate, Nestor Martin inserts can distribute their warmth throughout the home. The IT and ITH models are equipped with integrated fans, as well as with two hot air outlets which allow you to channel the warmth of the stove into other rooms of the house.



IT43 - Graphite

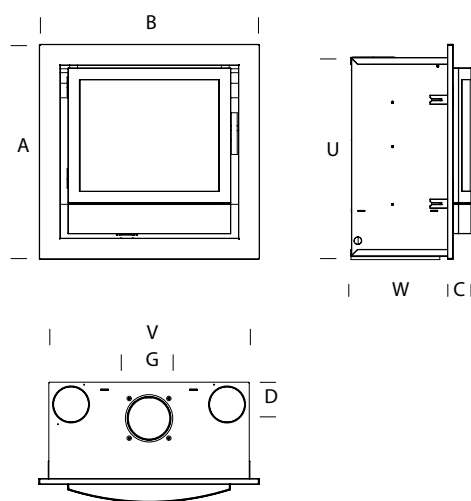

MODEL	IT33	IT43	ITH33	ITH43
AxBxC (mm)	725x743x77	749x852x99	822x743x77	929x852x99
UxVxW (mm)	670x677x336	706x797x375	767x677x336	871x797x375
D (mm)	122	139	122	139
G Ø ext. (mm)	150	180	150	180
Window dimensions (mm)	403x498	423x608	500x498	608x603
Weight (kg)	129	135	142	190
Max. heat output (kW)	10	11,5	10,5	12,5
DIN heat output, nominal (kW)	8	10	8	10
Heating Capacity (m ³)*	100	100	125	125
Efficiency (%)	75	75	80	75
Emissions CO (%)	0,081	0,092	0,071	0,074
Δ Flue Gas Temp (°C)	266	283	237	298
Certification	CE / DIN	CE / DIN	CE / DIN	CE / DIN
Max. log length (cm)	33	50	33	50
Hot air outlets	2x Ø 125 mm	2x Ø 125 mm	2x Ø 125 mm	2x Ø 125 mm
Adjustable legs	no	no	no	no
Number of fans	2 (standard)	2 (standard)	2 (standard)	2 (standard)

* Approximate heating capacity, based on average insulation